

➤ Low-Profile Wallmount Cabinet (Double Section)



Features:

- Max. Capacity : 13U
- Static loading capacity : 50 Kgs.
- Two Height available: (501mm & 769mm)
- External dimension of cabinet: 600mm (width)*270mm(depth)
- Toughened glass front door, could observe devices' operation
- Cable entries are available at top cover, good ventilation (cooling fans are optional)
- 2 pieces of mounting profiles are available. From the bottom up, install 2U mounting horizontally from the 1st U; install 4U mounting profiles horizontally from the 6th U. The installation position for 4U mounting profiles could be adjusted from the 6th U to the 9th U.
- Cable entries at the back of wall mounted enclosure are available. Metal cable management rings are installed at the back for cable management.
- Easy operation and maintaining at the back of enclosure.

Ordering Information:





P/N	Color	W*D*H (mm)	Max. capacity
NB-CAB-070	Black (RAL9004)	600*270*769	13U
NB-CAB-071	Gray (RAL7035)	600*270*769	13U
NB-CAB-072	Black (RAL9004)	600*270*501	8U
NB-CAB-073	Gray (RAL7035)	600*270*501	8U

➤ Open Racks

Features:

- Standard: comply with ANSI/EIA; RS-310-D, IEC297-2, DIN41491, PART1, DIN41494 PART7, GB/T3047.2-92 standard.
- Modular design, easily assemble and disassemble for delivery, low-cost.
- Various optional accessories according to requirements (cable management slot, cable management, removable working panel, etc.)
- 19" frame 2mm welded fold steel sheet, two side figure punching.
- **COLOR:** Black (RAL9004)


Two post 42U (Space saver)

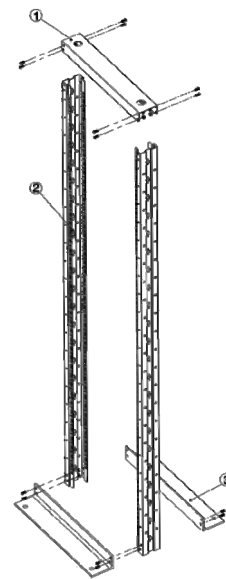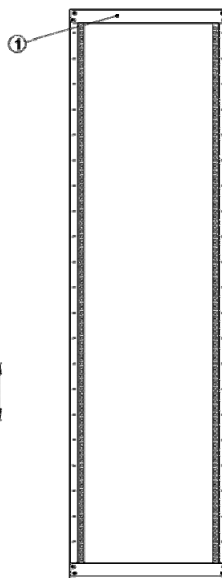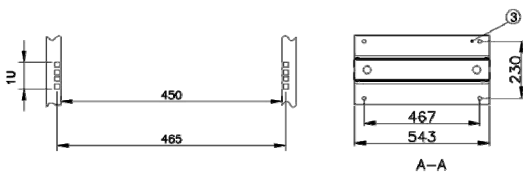


1. Horizontal beam 2. Pole 3. Plinth

➤ Open Racks

Four post 42U

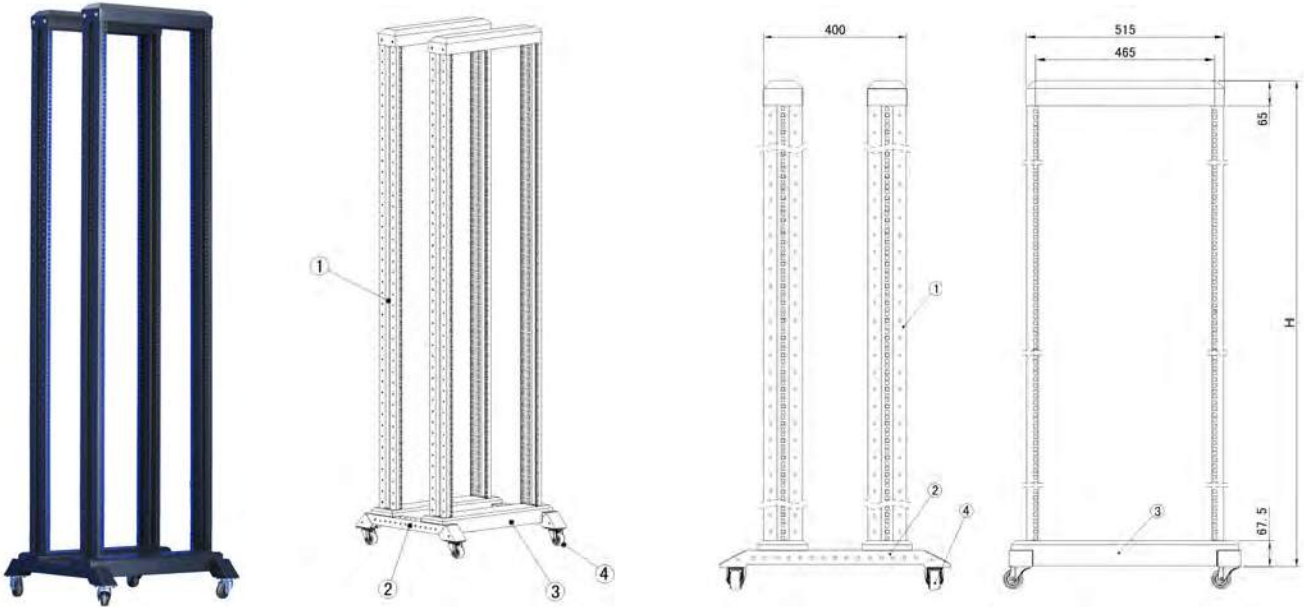

Two post 42U

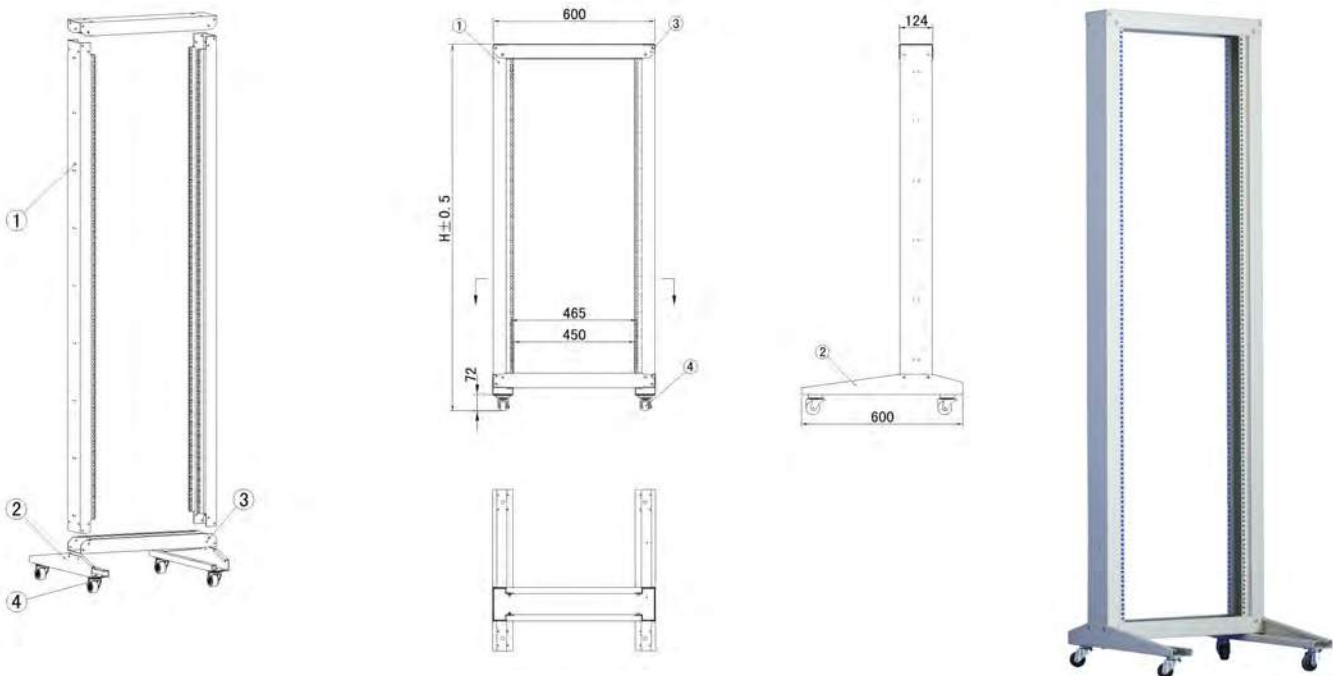

1-Pole 2- Plinth 3- Horizontal beam 4- Heavy duty castor

Ordering Information:

Capacity	Color	Static Loading	P/N
Two post 42U	Black (RAL9004)	150KG	NB-CAB-078
Four post 42U	Black (RAL9004)	150KG	NB-CAB-094
Two post 42U (Space saver)	Black (RAL9004)	200KG	NB-CAB-133
Cable Management Slot for open Rack, 42U	Black (RAL9004)		NB-CAB-128

➤ Economy Floor Standing Server Racks with Front Metal Door

Feature:

- Comply with ANSI/EIA;RS-310-D; DIN41491; PART1; IEC297-2; DIN41494; PART7; GB/T3047.2-92 standard, compatible 19" international standard, metric system standard and ETSI standard;
- Optional cable entry on top cover and bottom panel, removable front & rear door and side panel facility, ventilation and rat-proof on the bottom.
- Reliable structure, static loading capacity: 800KG
- Adjustable feet and castors are available, moving conveniently, and fixing reliable
- Hexagonal reticular high-density vented front door, Double section high-density vented rear door.
- Varies optional accessories, reliable quality.
- Excellent ventilation and heat dispersing .
- **Surface Finish:** degreasing, pickling, phosphoric, powder coated.
- **Material:** SPCC cold rolled steel
- **Thickness:** mounting profile 2.0mm, others: 1.2-1.5mm
- **Degree of Protection:** IP20
- **Color:** RAL9004 (Black) ; RAL7035 (Gray)



Double-section high-density vented rear door



Fan unit



Spring lock, High density vented door



Adjustable mounting profile & mounting angle



U mark mounting rail



Lockable cable entry



Earthing



800mm Width cabinet comes with 2 metal cable management slot with cap



Front Metal Curved Vented door

Ordering Information:

Part Number	Description	Color	Width	Depth	High	Part Number	Description	Color	Width	Depth	High
NB-CAB-147	22U Cabinet	Black (RAL9004)	600mm	600mm	1166mm	NB-CAB-156	42U Cabinet	Black (RAL9004)	600mm	600mm	2055mm
NB-CAB-148	22U Cabinet	Black (RAL9004)	600mm	800mm	1166mm	NB-CAB-157	42U Cabinet	Black (RAL9004)	600mm	800mm	2055mm
NB-CAB-149	22U Cabinet	Black (RAL9004)	600mm	1000mm	1166mm	NB-CAB-103	42U Cabinet	Black (RAL9004)	600mm	1000mm	2055mm
NB-CAB-150	22U Cabinet	Black (RAL9004)	800mm	800mm	1166mm	NB-CAB-104	42U Cabinet	Black (RAL9004)	800mm	800mm	2055mm
NB-CAB-151	22U Cabinet	Black (RAL9004)	800mm	1000mm	1166mm	NB-CAB-105	42U Cabinet	Black (RAL9004)	800mm	1000mm	2055mm
NB-CAB-152	27U Cabinet	Black (RAL9004)	600mm	600mm	1388mm	NB-CAB-158	47U Cabinet	Black (RAL9004)	600mm	600mm	2277mm
NB-CAB-153	27U Cabinet	Black (RAL9004)	600mm	800mm	1388mm	NB-CAB-159	47U Cabinet	Black (RAL9004)	600mm	800mm	2277mm
NB-CAB-102	27U Cabinet	Black (RAL9004)	600mm	1000mm	1388mm	NB-CAB-160	47U Cabinet	Black (RAL9004)	600mm	1000mm	2277mm
NB-CAB-154	27U Cabinet	Black (RAL9004)	800mm	800mm	1388mm	NB-CAB-161	47U Cabinet	Black (RAL9004)	800mm	800mm	2277mm
NB-CAB-155	27U Cabinet	Black (RAL9004)	800mm	1000mm	1388mm	NB-CAB-162	47U Cabinet	Black (RAL9004)	800mm	1000mm	2277mm

➤ Economy Floor Standing Server Racks with Front Glass Door

Feature:

- Comply with ANSI/EIA;RS-310-D; DIN41491; PART1; IEC297-2; DIN41494; PART7; GB/T3047.2-92 standard, compatible 19" international standard, metric system standard and ETSI standard;
- Optional cable entry on top cover and bottom panel, removable front & rear door and side panel facility, ventilation and rat-proof on the bottom.
- Reliable structure, static loading capacity: 800KG
- Adjustable feet and castors are available, moving conveniently, and fixing reliable
- Tempered glass front door with vented border, Double section high-density vented rear door.
- Varies optional accessories, reliable quality.
- Excellent ventilation and heat dispersing .
- **Surface Finish:** degreasing, pickling, phosphoric, powder coated.
- **Material:** SPCC cold rolled steel
- **Thickness:** mounting profile 2.0mm, others: 1.2-1.5mm
- **Degree of Protection:** IP20
- **Color:** RAL9004 (Black) ; RAL7035 (Gray)



Double-section high-density vented rear door



Fan unit



Vented border



Adjustable mounting profile & mounting angle



U mark mounting rail




Lockable cable entry



Earthing



800mm Width cabinet comes with 2 metal cable management slot with cap

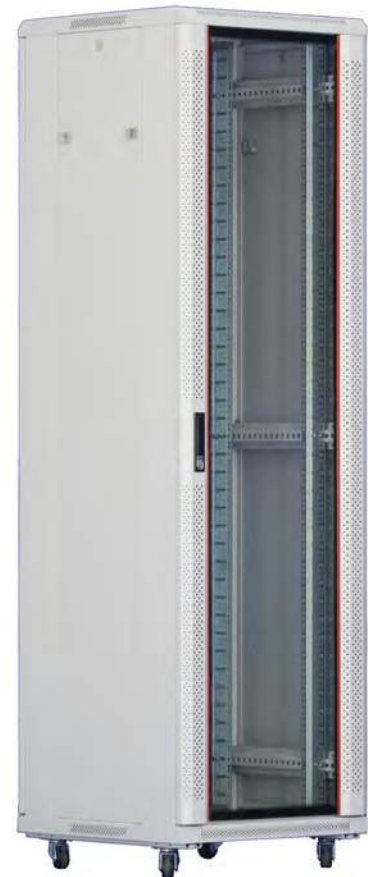

Tempered glass front door with vented border


Ordering Information:

Part Number	Description	Color	Width	Depth	High	Part Number	Description	Color	Width	Depth	High
NB-CAB-163	22U Cabinet	Black (RAL9004)	600mm	600mm	1166mm	NB-CAB-171	42U Cabinet	Black (RAL9004)	600mm	600mm	2055mm
NB-CAB-164	22U Cabinet	Black (RAL9004)	600mm	800mm	1166mm	NB-CAB-172	42U Cabinet	Black (RAL9004)	600mm	800mm	2055mm
NB-CAB-165	22U Cabinet	Black (RAL9004)	600mm	1000mm	1166mm	NB-CAB-113	42U Cabinet	Black (RAL9004)	600mm	1000mm	2055mm
NB-CAB-166	22U Cabinet	Black (RAL9004)	800mm	800mm	1166mm	NB-CAB-114	42U Cabinet	Black (RAL9004)	800mm	800mm	2055mm
NB-CAB-167	22U Cabinet	Black (RAL9004)	800mm	1000mm	1166mm	NB-CAB-111	42U Cabinet	Black (RAL9004)	800mm	1000mm	2055mm
NB-CAB-168	27U Cabinet	Black (RAL9004)	600mm	600mm	1388mm	NB-CAB-173	47U Cabinet	Black (RAL9004)	600mm	600mm	2277mm
NB-CAB-169	27U Cabinet	Black (RAL9004)	600mm	800mm	1388mm	NB-CAB-174	47U Cabinet	Black (RAL9004)	600mm	800mm	2277mm
NB-CAB-112	27U Cabinet	Black (RAL9004)	600mm	1000mm	1388mm	NB-CAB-175	47U Cabinet	Black (RAL9004)	600mm	1000mm	2277mm
NB-CAB-170	27U Cabinet	Black (RAL9004)	800mm	800mm	1388mm	NB-CAB-176	47U Cabinet	Black (RAL9004)	800mm	800mm	2277mm
NB-CAB-134	27U Cabinet	Black (RAL9004)	800mm	1000mm	1388mm	NB-CAB-177	47U Cabinet	Black (RAL9004)	800mm	1000mm	2277mm

➤ Floor Standing Networking Cabinets

Feature:

- Comply with ANSI/EIA;RS-310-D; DIN41491; PART1; IEC297-2; DIN41494; PART7; GB/T3047.2-92 standard, compatible 19" international standard, metric system standard and ETSI standard;
- Optional cable entry on top cover and bottom panel, removable front & rear door and side panel facility, ventilation and rat-proof on the bottom.
- Reliable structure, static loading capacity: 500KG
- Adjustable feet and castors are available, moving conveniently, and fixing reliable
- International popular tempered glass front door, steel rear door.
- Varies optional accessories, reliable quality.
- Good ventilation and heat dispersing .
- **Surface Finish:** degreasing, pickling, phosphoric, powder coated.
- **Material:** SPCC cold rolled steel,
- **Thickness:** mounting profile 2.0mm, others: 1.2-1.5mm
- **Degree of Protection:** IP20
- **Color:** RAL9004 (Black) ; RAL7035 (Gray)



U mark mounting rail



Adjustable mounting profile & mounting angle



Earthing



Removable front door



Fan unit




Back door view




Lockable cable entry



800mm Width cabinet comes with 2 metal cable management slot with cap

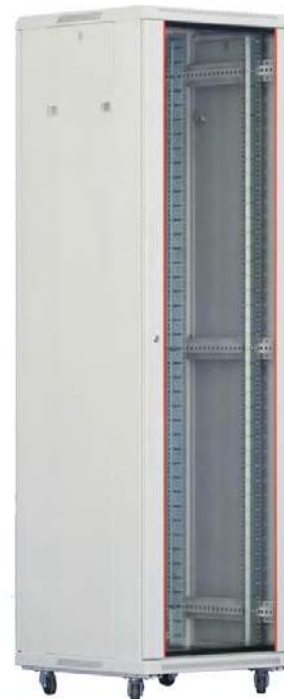

Front door view

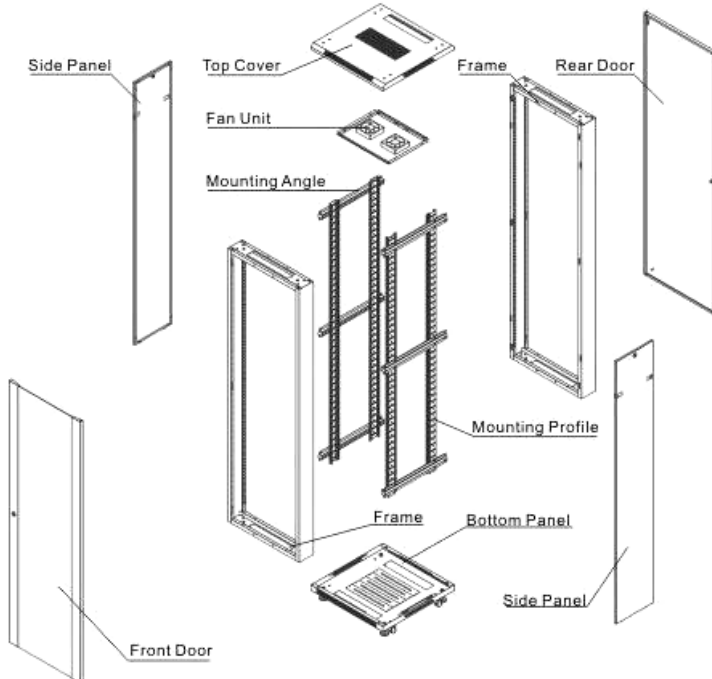

Ordering Information:

Part Number	Description	Color	Width	Depth	High	Part Number	Description	Color	Width	Depth	High
NB-CAB-143	18U Cabinet	Black (RAL9004)	600mm	600mm	988mm	NB-CAB-127	27U Cabinet	Gray (RAL7035)	600mm	600mm	1388mm
NB-CAB-144	18U Cabinet	Gray (RAL7035)	600mm	600mm	988mm	NB-CAB-083	27U Cabinet	Black (RAL9004)	600mm	800mm	1388mm
NB-CAB-145	18U Cabinet	Black (RAL9004)	600mm	800mm	988mm	NB-CAB-084	27U Cabinet	Gray (RAL7035)	600mm	800mm	1388mm
NB-CAB-146	18U Cabinet	Gray (RAL7035)	600mm	800mm	988mm	NB-CAB-017	42U Cabinet	Black (RAL9004)	600mm	600mm	2055mm
NB-CAB-124	22U Cabinet	Black (RAL9004)	600mm	600mm	1166mm	NB-CAB-018	42U Cabinet	Gray (RAL7035)	600mm	600mm	2055mm
NB-CAB-125	22U Cabinet	Gray (RAL7035)	600mm	600mm	1166mm	NB-CAB-019	42U Cabinet	Black (RAL9004)	600mm	800mm	2055mm
NB-CAB-015	22U Cabinet	Black (RAL9004)	600mm	800mm	1166mm	NB-CAB-020	42U Cabinet	Gray (RAL7035)	600mm	800mm	2055mm
NB-CAB-016	22U Cabinet	Gray (RAL7035)	600mm	800mm	1166mm	NB-CAB-097	42U Cabinet	Black (RAL9004)	800mm	800mm	2055mm
NB-CAB-126	27U Cabinet	Black (RAL9004)	600mm	600mm	1388mm	NB-CAB-098	42U Cabinet	Black (RAL9004)	800mm	1000mm	2055mm