

POWER DISTRIBUTION



POWER DISTRIBUTION UNITS

92 - 98


6 Outlets BS1363 Plastic PDU

P/N: NB-ACC-001 	
Socket Type	BS1363 (90 degree) Outlet Module (6)
RoHS	Yes
Bracket Install	19" installation
Cable with plug	BS1363 13A plug
Control Function	Non
Case color	White plastic with Black Metal Instal Panel
Cable Specification	3 x 1.25 mm ² x 1.8M
Rating voltage	250VAC 50/60Hz
Max. Power	3250W
Dimension	L x W x H = 482.5 x 37.5 x 100 mm
Mounting Length	465 mm
Case Length	438 mm
Fittings	2pcs ij6x16mm bolt, 2pcs M6 float nut
Safety Authentication	CE
Interior Connection wire	1.25 mm ²

6 Outlets Universal PDU

P/N: NB-ACC-070 	
Socket Type	GB2099.3 Socket (90 degree) Outlet Module (6)
RoHS	Yes
Bracket Install	19" Frontal installat on
Cable with plug	BS1363 13A plug
Control Function	16A Lighted master switch
Case color	Black
Cable Specification	3 x 1.5 mm ² x 2M
Rating voltage	250VAC 50/60Hz
Max. Power	4000W
Dimension	L x W x H = 494 x 44.4 x 62 mm
Mounting Length	466 mm
Case Length	438 mm
Fittings	No
Safety Authentication	CE
Interior Connection wire	1.5 mm ²

12 Outlets BS1363 PDU (32A)

P/N: NB-ACC-071 	
Socket Type	BS1363 13A (45 degree) Outlet Module (12)
RoHS	Yes
Bracket Install	Inverse installation
Cable with plug	IEC60309 plug, (32A 2p+E)
Control Function	No controlling function
Case color	Black
Cable Specification	3 x 6.0 mm ² x 3M
Rating voltage	250VAC 50/60Hz
Max. Power	8000W
Dimension	L x W x H = 860 x 44.4 x 62 mm
Mounting Length	832 mm
Case Length	804 mm
Fittings	2pcs ij6x16mm cross bolt, 2pcs M6 float nut, PDU manual
Safety Authentication	CE
Interior Connection wire	2.5 mm ²

6 Outlets BS1363 PDU

P/N: NB-ACC-043	 
Socket Type	BS1363 (90 degree) Outlet Module (6)
RoHS	Yes
Bracket Install	19" Frontal installation
Cable with plug	BS1363 13A plug
Control Function	Power switch, overload protecting & indicator
Case color	Black
Cable Specification	3 x 1.5 mm ² x 3M
Rating voltage	250VAC 50/60Hz
Max. Power	3250W
Dimension	L x W x H = 482.6 x 44.4 x 62 mm
Mounting Length	465 mm
Case Length	432 mm
Fittings	2pcs $\phi 6 \times 16$ mm cross bolt, 2pcs M6 float nut, PDU manual
Safety Authentication	CE
Interior Connection wire	1.5 mm ²

6 Outlets BS1363 PDU

P/N: NB-ACC-058	 
Socket Type	BS1363 (90 degree) Outlet Module (6)
RoHS	Yes
Bracket Install	19" Frontal installation
Cable with plug	BS1363 13A plug
Control Function	16A Lighted master switch
Case color	Black
Cable Specification	3 x 1.5 mm ² x 3M
Rating voltage	250VAC 50/60Hz
Max. Power	3250W
Dimension	L x W x H = 487 x 44.4 x 62 mm
Mounting Length	459 mm
Case Length	431 mm
Fittings	2pcs $\phi 6 \times 16$ mm cross bolt, 2pcs M6 float nut, PDU manual
Safety Authentication	CE
Interior Connection wire	1.5 mm ²

8 Outlets BS1363 PDU

P/N: NB-ACC-002	 
Socket Type	BS1363 (45 degree) Outlet Module (8)
RoHS	Yes
Bracket Install	Inverse installation
Cable with plug	BS1363 13A plug
Control Function	Power switch, overload protecting & indicator
Case color	Black
Cable Specification	3 x 1.5 mm ² x 3M
Rating voltage	250VAC 50/60Hz
Max. Power	3250W
Dimension	L x W x H = 661 x 44.4 x 62 mm
Mounting Length	633 mm
Case Length	605 mm
Fittings	2pcs $\phi 6 \times 16$ mm cross bolt, 2pcs M6 float nut, PDU manual
Safety Authentication	CE
Interior Connection wire	1.5 mm ²

8 Outlets BS1363 PDU

P/N: NB-ACC-059



Socket Type	BS1363 (45 degree) Outlet Module (8)
RoHS	Yes
Bracket Install	Inverse installation
Cable with plug	BS1363 13A plug
Control Function	16A Lighted master switch
Case color	Black
Cable Specification	3 x 1.5 mm ² x 3M
Rating voltage	250VAC 50/60Hz
Max. Power	3250W
Dimension	L x W x H = 640 x 44.4 x 62 mm
Mounting Length	590 mm
Case Length	562 mm
Fittings	2pcs ϕ 6x16mm cross bolt, 2pcs M6 float nut, PDU manual
Safety Authentication	CE
Interior Connection wire	1.5 mm ²

8 Outlets BS1363 PDU (32A)

P/N: NB-ACC-047



Socket Type	BS1363 13A (45 degree) Outlet Module (8)
RoHS	Yes
Bracket Install	Inverse installation
Cable with plug	IEC60309 plug, (32A 2p+E)
Control Function	No controlling function
Case color	Black
Cable Specification	3 x 6.0 mm ² x 3M
Rating voltage	250VAC 50/60Hz
Max. Power	8000W
Dimension	L x W x H = 620 x 44.4 x 62 mm
Mounting Length	592 mm
Case Length	564 mm
Fittings	2pcs ϕ 6x16mm cross bolt, 2pcs M6 float nut, PDU manual
Safety Authentication	CE
Interior Connection wire	2.5 mm ²

12 Outlets BS1363 PDU

P/N: NB-ACC-003



Socket Type	BS1363 (45 degree) Outlet Module (12)
RoHS	Yes
Bracket Install	Inverse installation
Cable with plug	BS1363 13A plug
Control Function	Power switch, overload protecting & indicator
Case color	Black
Cable Specification	3 x 1.5 mm ² x 3M
Rating voltage	250VAC 50/60Hz
Max. Power	3250W
Dimension	L x W x H = 901 x 44.4 x 62 mm
Mounting Length	873 mm
Case Length	845 mm
Fittings	2pcs ϕ 6x16mm cross bolt, 2pcs M6 float nut, PDU manual
Safety Authentication	CE
Interior Connection wire	1.5 mm ²

12 Outlets BS1363 PDU

P/N: NB-ACC-060	 
Socket Type	BS1363 (90 degree) Outlet Module (12)
RoHS	Yes
Bracket Install	19" Frontal installation
Cable with plug	BS1363 13A plug
Control Function	Power switch, overload protecting & indicator
Case color	Black
Cable Specification	3 x 1.5 mm ² x 3M
Rating voltage	250VAC 50/60Hz
Max. Power	3250W
Dimension	L x W x H = 483 x 88.8 x 62 mm
Mounting Length	465 mm
Case Length	427 mm
Fittings	2pcs $\phi 6 \times 16$ mm cross bolt, 2pcs M6 float nut, PDU manual
Safety Authentication	CE
Interior Connection wire	1.5 mm ²

6 Outlets US-type PDU

P/N: NB-ACC-005	 
Socket Type	IEC60906 Socket(NEMA5-15R)[6]
RoHS	Yes
Bracket Install	19" Frontal installation
Cable with plug	IEC60906 10A plug
Control Function	Power switch, overload protecting & indicator
Case color	Black
Cable Specification	3 x 1.5 mm ² x 3M
Rating voltage	250VAC 50/60Hz
Max. Power	3250W
Dimension	L x W x H = 482.6 x 44.4 x 62 mm
Mounting Length	465 mm
Case Length	432 mm
Fittings	2pcs $\phi 6 \times 16$ mm cross bolt, 2pcs M6 float nut, PDU manual
Safety Authentication	CE
Interior Connection wire	1.5 mm ²

6 Outlets US-type PDU

P/N: NB-ACC-061	 
Socket Type	IEC60906 Socket(NEMA5-15R)[6]
RoHS	Yes
Bracket Install	19" Frontal installation
Cable with plug	IEC60906 plug(NEMA 5-15P 15A)
Control Function	16A Lighted master switch
Case color	Black
Cable Specification	3 x 1.5 mm ² x 3M
Rating voltage	250VAC 50/60Hz
Max. Power	2500W
Dimension	L x W x H = 482 x 68 x 44.4mm
Mounting Length	465 mm
Case Length	429 mm
Fittings	2pcs $\phi 6 \times 16$ mm cross bolt, 2pcs M6 float nut, PDU manual
Safety Authentication	CE
Interior Connection wire	1.5 mm ²

8 Outlets US-type PDU

P/N: NB-ACC-062



Socket Type	IEC60906 Socket(NEMA5-15R)[8]
RoHS	Yes
Bracket Install	19" Frontal installation
Cable with plug	IEC60906 plug(NEMA 5-15P 15A)
Control Function	16A Lighted master switch
Case color	Black
Cable Specification	3 x 1.5 mm ² x 3M
Rating voltage	250VAC 50/60Hz
Max. Power	2500W
Dimension	L x W x H = 483.5 x 68 x 44.4mm
Mounting Length	465 mm
Case Length	430.5 mm
Fittings	2pcs φ6x16mm cross bolt, 2pcs M6 float nut, PDU manual
Safety Authentication	CE
Interior Connection wire	1.5 mm ²

8 Outlets IEC PDU

P/N: NB-ACC-048



Socket Type	Single IEC320 C13 Socket (8)
RoHS	Yes
Bracket Install	19" Frontal installation
Cable with plug	BS1363 13A plug
Control Function	No controlling function
Case color	Black
Cable Specification	3 x 1.5 mm ² x 3M
Rating voltage	250VAC 50/60Hz
Max. Power	3250W
Dimension	L x W x H = 482.6x 44.4 x 62 mm
Mounting Length	465 mm
Case Length	428 mm
Fittings	2pcs φ6x16mm cross bolt, 2pcs M6 float nut, PDU manual
Safety Authentication	CE
Interior Connection wire	1.5 mm ²

6 Outlets German-type PDU

P/N: NB-ACC-063



Socket Type	DIN49440 16A Socket [6]
RoHS	Yes
Bracket Install	19" Frontal installation
Cable with plug	DIN49441 16A Plug
Control Function	Power switch, overload protecting & indicator
Case color	Black
Cable Specification	3 x 1.5 mm ² x 3M
Rating voltage	250VAC 50/60Hz
Max. Power	4000W
Dimension	L x W x H = 483.5 x 68 x 44.4mm
Mounting Length	465 mm
Case Length	430.5 mm
Fittings	2pcs φ6x16mm cross bolt, 2pcs M6 float nut, PDU manual
Safety Authentication	CE
Interior Connection wire	Combined copper

6 Outlets German-type PDU


P/N: NB-ACC-064



Socket Type	DIN49440 16A Socket [6]
RoHS	Yes
Bracket Install	19" Frontal installation
Cable with plug	DIN49441 16A Plug
Control Function	No controlling function
Case color	Black
Cable Specification	3 x 1.5 mm ² x 3M
Rating voltage	250VAC 50/60Hz
Max. Power	4000W
Dimension	L x W x H = 482.6 x 68 x 44.4mm
Mounting Length	465 mm
Case Length	430.5 mm
Fittings	2pcs ϕ 6x16mm cross bolt, 2pcs M6 float nut, PDU manual
Safety Authentication	CE
Interior Connection wire	Combined copper

8 Outlets German-type PDU

P/N: NB-ACC-065

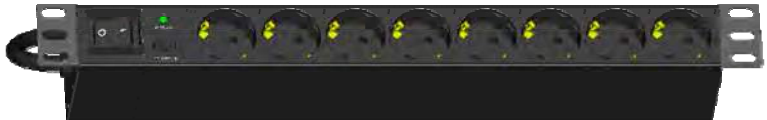

Socket Type	DIN49440 16A Socket [8]
RoHS	Yes
Bracket Install	19" Frontal installation
Cable with plug	DIN49441 16A Plug
Control Function	Power switch, overload protecting & indicator
Case color	Black
Cable Specification	3 x 1.5 mm ² x 3M
Rating voltage	250VAC 50/60Hz
Max. Power	4000W
Dimension	L x W x H = 487.5 x 68 x 44.4mm
Mounting Length	465 mm
Case Length	428 mm
Fittings	2pcs ϕ 6x16mm cross bolt, 2pcs M6 float nut, PDU manual
Safety Authentication	CE
Interior Connection wire	Combined copper

8 Outlets German-type PDU

P/N: NB-ACC-066



Socket Type	DIN49440 16A Socket [8]
RoHS	Yes
Bracket Install	19" Frontal installation
Cable with plug	DIN49441 16A Plug
Control Function	No controlling function
Case color	Black
Cable Specification	3 x 1.5 mm ² x 3M
Rating voltage	250VAC 50/60Hz
Max. Power	4000W
Dimension	L x W x H = 482.6 x 68 x 44.4mm
Mounting Length	465 mm
Case Length	428 mm
Fittings	2pcs ϕ 6x16mm cross bolt, 2pcs M6 float nut, PDU manual
Safety Authentication	CE
Interior Connection wire	Combined copper

6 Outlets German-type PDU (32A)

P/N: NB-ACC-067



Socket Type	DIN49440 16A Socket (6)
RoHS	Yes
Bracket Install	19" Frontal installation
Cable with plug	IEC60309 plug (32A 2P+E)
Control Function	No controlling function
Case color	Black
Cable Specification	3 x 6.0 mm ² x 3M
Rating voltage	250VAC 50/60Hz
Max. Power	8000W
Dimension	L x W x H = 482.6 x 68 x 44.4mm
Mounting Length	465 mm
Case Length	430.5 mm
Fittings	2pcs ϕ 6x16mm cross bolt, 2pcs M6 float nut, PDU manual
Safety Authentication	CE
Interior Connection wire	2.5 mm ²

8 Outlets German-type PDU (32A)

P/N: NB-ACC-068



Socket Type	DIN49440 16A Socket (8)
RoHS	Yes
Bracket Install	19" Frontal installation
Cable with plug	IEC60309 plug (32A 2P+E)
Control Function	No controlling function
Case color	Black
Cable Specification	3 x 6.0 mm ² x 3M
Rating voltage	250VAC 50/60Hz
Max. Power	8000W
Dimension	L x W x H = 481x 68 x 44.4 mm
Mounting Length	454.5 mm
Case Length	428 mm
Fittings	2pcs ϕ 6x16mm cross bolt, 2pcs M6 float nut, PDU manual
Safety Authentication	CE
Interior Connection wire	2.5 mm ²

12 Outlets German-type PDU (32A)

P/N: NB-ACC-069



Socket Type	DIN49440 16A Socket (12)
RoHS	Yes
Bracket Install	Inverse installation
Cable with plug	IEC60309 plug (32A 2P+E)
Control Function	No controlling function
Case color	Black
Cable Specification	3 x 6.0 mm ² x 3M
Rating voltage	250VAC 50/60Hz
Max. Power	8000W
Dimension	L x W x H = 694 x 68 x 44.4 mm
Mounting Length	667.5 mm
Case Length	641 mm
Fittings	2pcs ϕ 6x16mm cross bolt, 2pcs M6 float nut, PDU manual
Safety Authentication	CE
Interior Connection wire	2.5 mm ²